



DOSATRON®

WATER POWERED DOSING TECHNOLOGY


3 GPM: D07RE5

Product Specifications

Dilution Range:	1:128 to 1:18 (.8% to 5.5%)
Water Flow Range:	.02 to 3 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none">• Polyacetal (Standard Blue)• PVDF (White)
Dimensions:	10" x 4 1/2"
Weight:	2 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Basic Installation

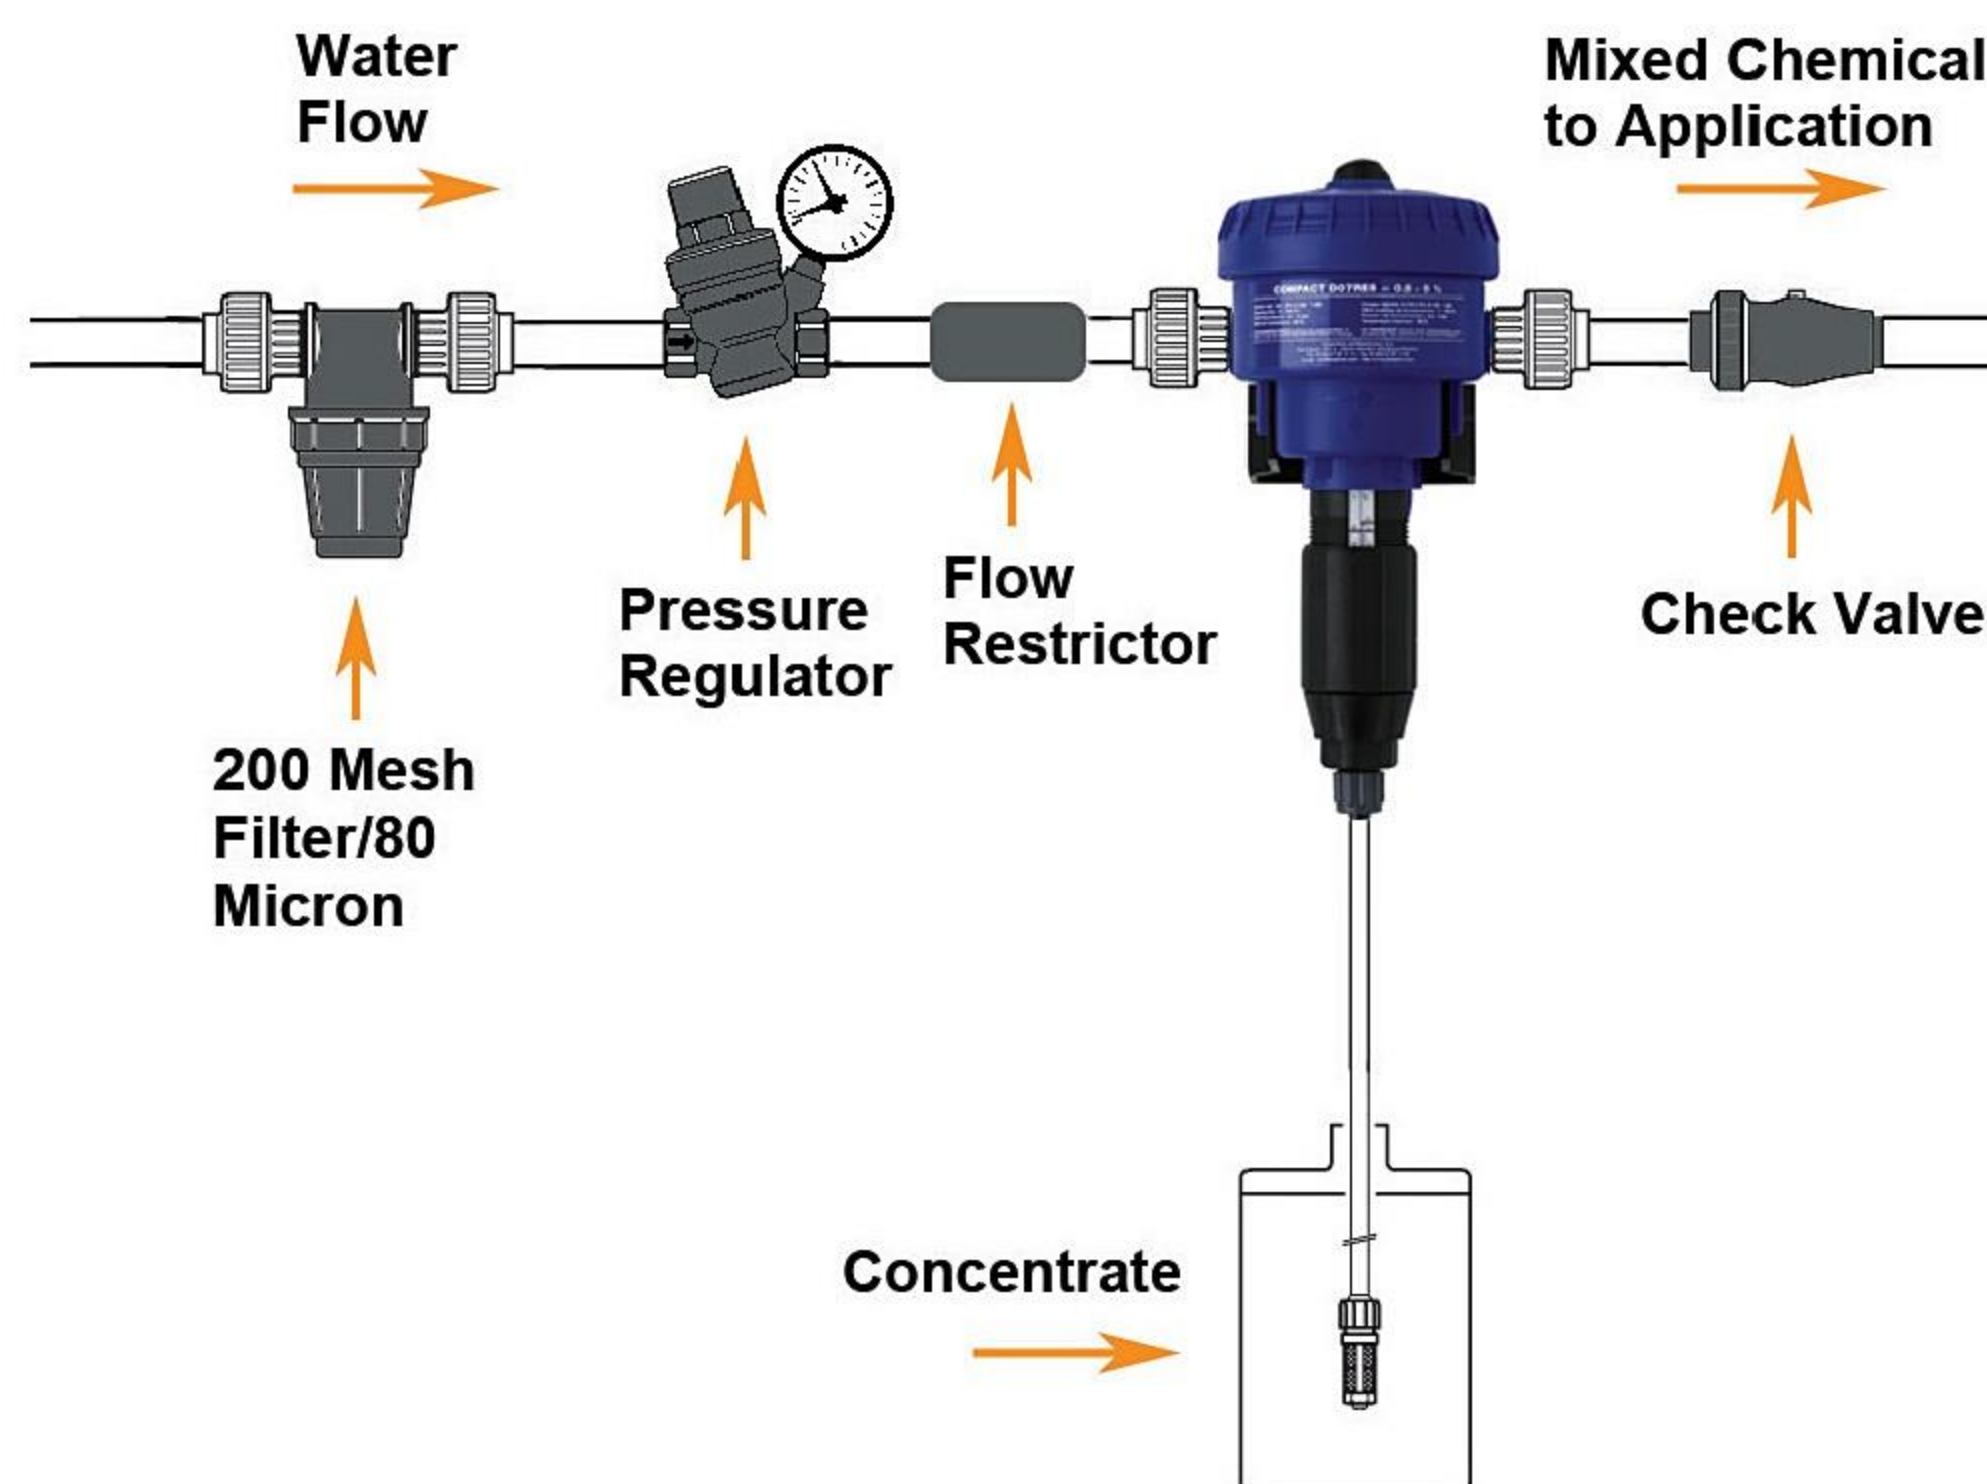

DOSATRON
@dosatron



Dosatron Thailand

Wang Daeng Industrial Supplies Co.,Ltd

116/98 Moo3, T.Bowin A.Sriracha Chonburi 20230 THAILAND

Tel: (038) 337-838-9 Fax: (038) 337-840 www.WANGDEX.com