



Product 380

July 2003

PRODUCT DESCRIPTION

LOCTITE® 380 Instant Adhesive provides the following product characteristics:

Technology	Cyanoacrylate
Chemical Type	Ethyl Cyanoacrylate
Appearance (uncured)	Black liquid ^{LMS}
Components	One part - requires no mixing
Viscosity	Medium
Cure	Humidity
Application	Bonding
Key Substrates	Metals, Plastics and Rubbers

Product 380 is a rubber toughened adhesive with increased flexibility and peel strength along with enhanced resistance to shock.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Specific Gravity @ 25°C	1.10
Viscosity @ 25°C, mPa·s:	
Brookfield RVT:	
Spindle 3 @ 50 rpm	100 to 800 ^{LMS}
Flash Point (COC), °C	>93

TYPICAL CURING PERFORMANCE

Under normal conditions, the atmospheric moisture initiates the curing process. Although full functional strength is developed in a relatively short time, curing continues for at least 24 hours before full chemical/solvent resistance is developed.

Cure Speed vs. Substrate

The rate of cure will depend on the substrate used. The table below shows the fixture time achieved on different materials at 22°C, 50% relative humidity. This is defined as the time to develop a shear strength of 0.1N/mm²

Fixture Time, ASTM D 1002/ EN 1465, seconds:	
Steel (degreased)	60 to 120
Aluminum	10 to 30
Neoprene	15 to 25
Rubber, Nitrile	15 to 25
ABS	20 to 50
PVC	50 to 100
Polycarbonate	30 to 90
Phenolic Materials	20 to 60

Cure Speed vs. Bond Gap

The rate of cure will depend on the bondline gap. Thin bond lines result in high cure speeds, increasing the bond gap will decrease the rate of cure

Cure Speed vs. Activator

Where cure speed is unacceptably long due to large gaps, applying activator to the surface will improve cure speed. However, this can reduce ultimate strength of the bond and therefore testing is recommended to confirm effect

TYPICAL PROPERTIES OF CURED MATERIAL

Cured for 24 hours @ 22°C.

Physical Properties:

Coefficient of Thermal Expansion, ASTM D 696, K ⁻¹	80×10 ⁻⁶
Coefficient of Thermal Conductivity, ASTM C177, W.m ⁻¹ K ⁻¹	0.10
Glass Transition Temperature, ASTM E 228, °C	120

Electrical Properties:

Dielectric Constant / Loss, ASTM D 150:	
50 Hz	2.30 / <0.02
1kHz	2.30 / <0.02
1mHz	2.30 / <0.02
Volume Resistivity, ASTM D 257, Ωcm	1×10 ¹⁶
Dielectric Strength, ASTM D 149, kV/mm	25

PERFORMANCE OF CURED MATERIAL

Cured for 24 hours @ 22°C.

Adhesive Properties:

Shear Strength, ASTM D 1002/ EN 1465, N/mm ² :	
Steel (grit blasted)	22 to 30
Aluminum (etched)	14 to 22
ABS	>6
PVC	>4
Polycarbonate	>5
Phenolic Materials	5 to 15
Rubber, Neoprene	>10
Rubber, Nitrile	>10
Tensile Strength, ASTM D 2095, DIN 53288, N/mm ² :	
Steel (grit blasted)	12 to 25

Cured 48 hours @ 22°C.

Adhesive Properties:

Shear Strength, ASTM D 1002/ EN 1465, N/mm ² :	
Steel (sandblasted)	≥17.20 ^{LMS}

Cured for 24 hours @ 22°C, 24 hours @ 121°C, tested @ 121°C.

Adhesive Properties:

Shear Strength, ASTM D 1002/ EN 1465, N/mm ² :	
Steel (sandblasted)	≥6.90 ^{LMS}

Cured for 24 hours @ 22°C, 24 hours @ 121°C, tested @ 22°C.

Adhesive Properties:

Shear Strength, ASTM D 1002/ EN 1465, N/mm ² :	
Steel (sandblasted)	≥19.30 ^{LMS}

Cured for 24 hours @ 22°C, 4 hours @ 121°C, tested @ 22°C.

Adhesive Properties:

Peel Strength, ASTM D 1876, DIN 53282, N/mm:
Steel (sandblasted) ≥ 2.60 ^{LMS}

TYPICAL ENVIRONMENTAL RESISTANCE


Cured 1 week @ 22°C.

Adhesive Properties:

Shear Strength, ASTM D 1002/ EN 1465:
Grit Blasted Mild Steel (GBMS)


Hot Strength

Tested at temperature

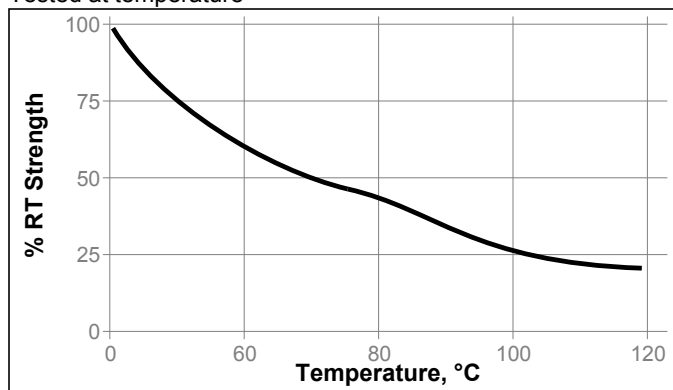

Heat Aging

Aged at temperature indicated and tested at 22°C

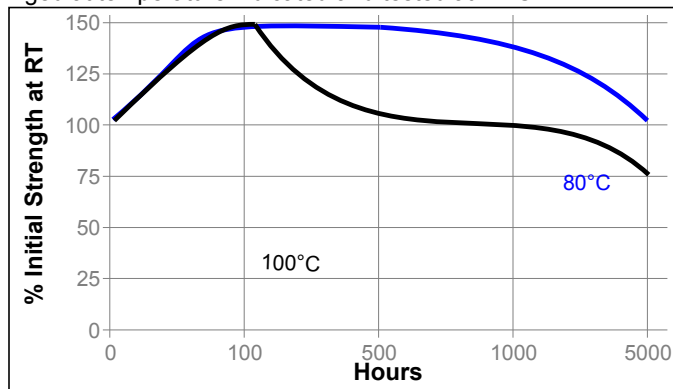

Chemical/Solvent Resistance

Aged under conditions indicated and tested at 22°C.

Environment	°C	% of initial strength		
		100 hr	500 hr	1000 hr
Motor Oil	40	85	85	85
Gasoline	22	90	70	70
Isopropanol	22	75	75	75
Industrial Methylated spirit	22	95	95	80
1,1,1 Trichloroethane	22	80	70	50
Freon TA	22	90	90	85
Heat/Humidity 95% RH	40	15	0	0

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).

Directions for use

1. For best performance bond surfaces should be clean and free from grease.
2. This product performs best in thin bond gaps (0.05 mm).
3. Excess adhesive can be dissolved with Loctite cleanup solvents, nitromethane or acetone.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Products shall be maintained, optimally, at temperatures between 2°C to 8°C unless otherwise labeled, or, specified. Storage, at temperatures below 2°C, or, greater than 8°C, is not recommended. Temperatures below 2°C and above 8°C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Loctite cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

Loctite Material Specification^{LMS}

LMS dated September 01, 1995. Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Loctite Quality.

Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$
 $\text{kV/mm} \times 25.4 = \text{V/mil}$
 $\text{mm} \times 0.039 = \text{inches}$
 $\text{mPas} = \text{cP}$
 $\text{N/mm}^2 \times 145 = \text{psi}$
 $\text{N} \times 0.225 = \text{lbs}$

Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Loctite Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Loctite Corporation's products. Henkel Loctite Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Loctite Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

LOCTITE is a Trademark of Henkel Loctite

Reference 0.0