



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY



## 40 GPM: D8RE5

### Product Specifications

Dilution Range:	1:100 to 1:20 (1% to 5%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	2 to 110 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 15/16" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, weighted strainer, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve.
Optional Accessories:	Bypass, part #: MPDI196



## Basic Installation

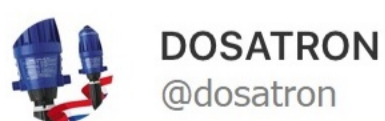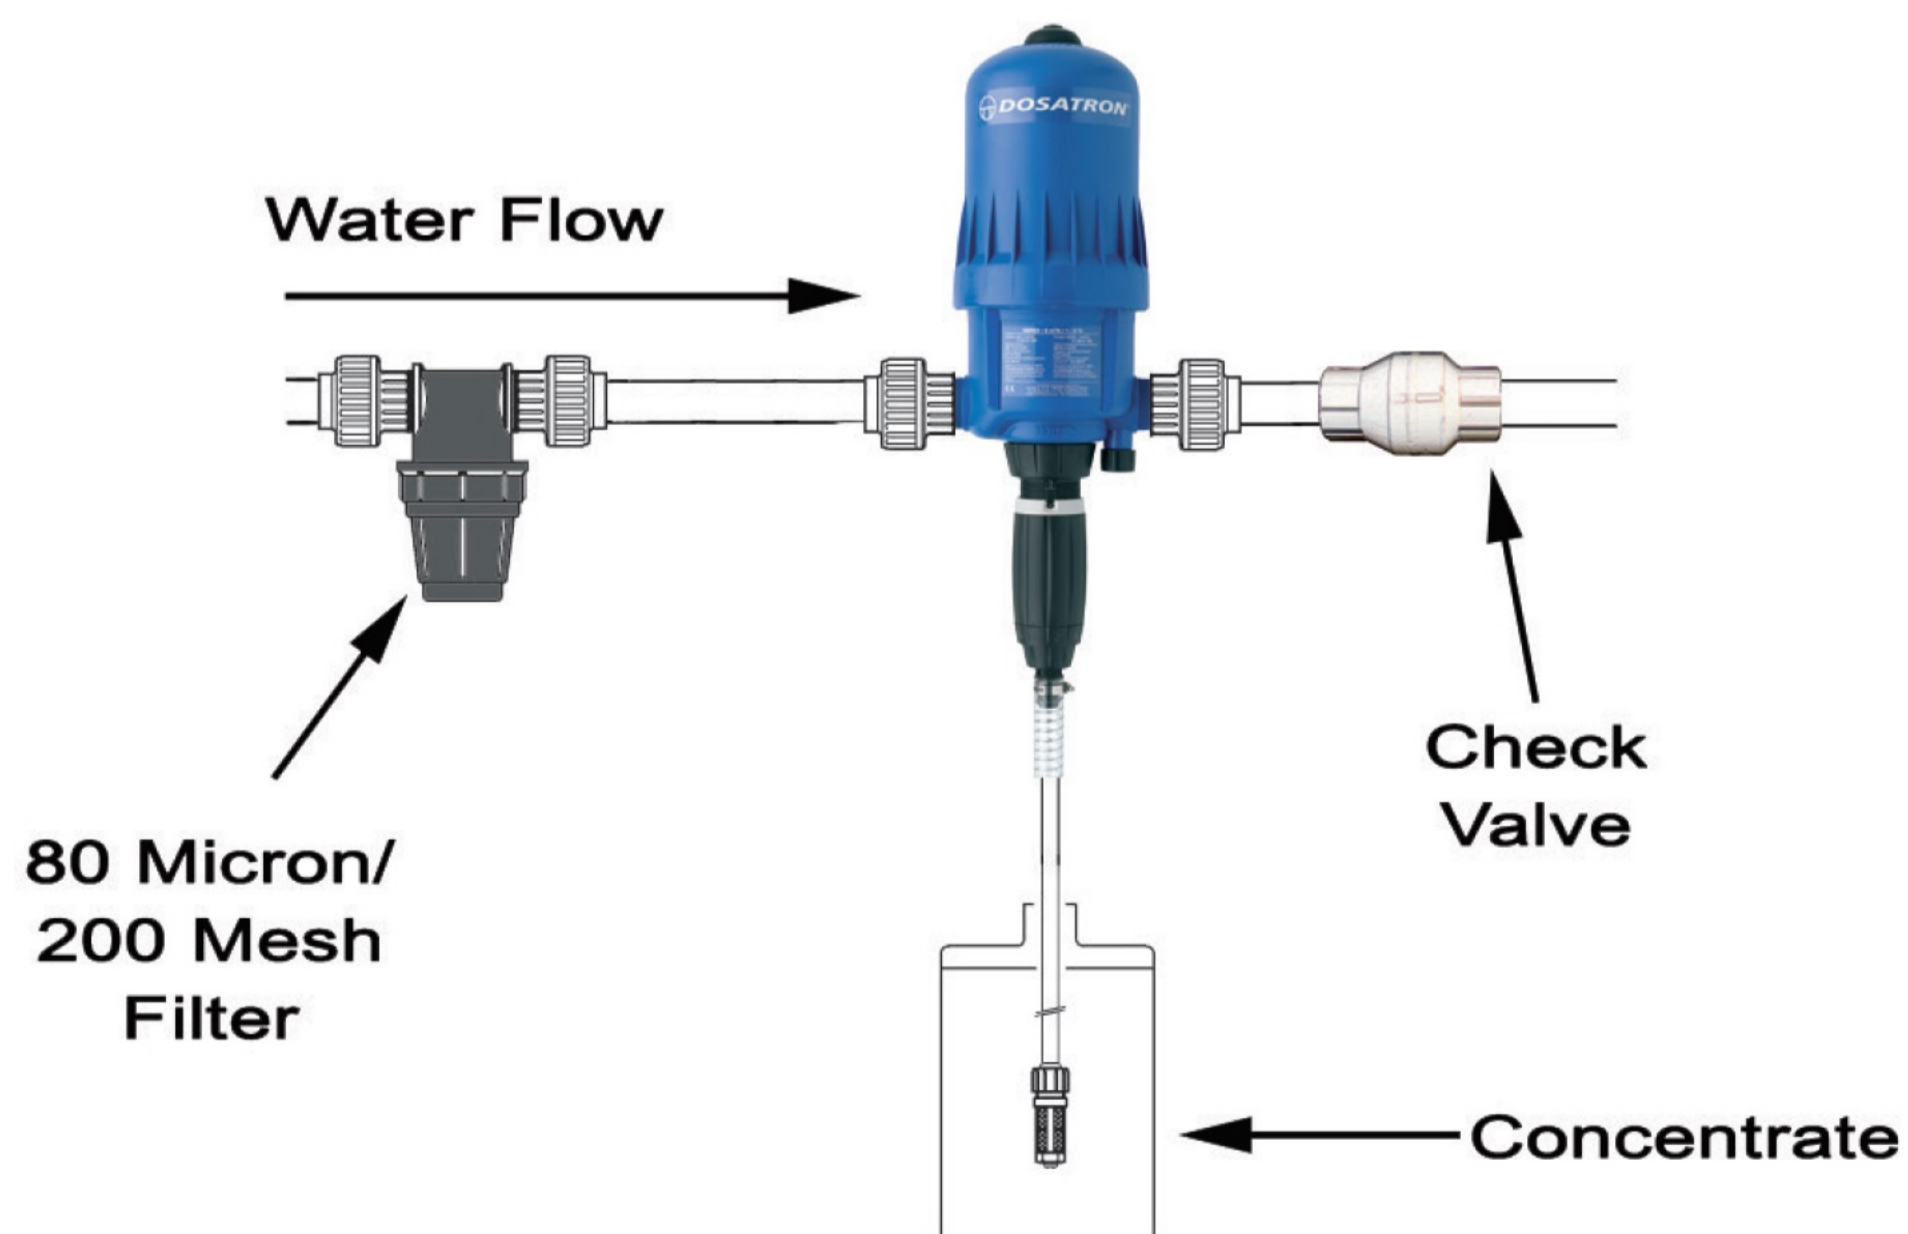

**Dosatron Thailand**

**Wang Daeng Industrial Supplies Co.,Ltd**

116/98 Moo3, T.Bowin A.Sriracha Chonburi 20230 THAILAND

Tel: (038) 337-838-9 Fax: (038) 337-840 [www.WANGDEX.com](http://www.WANGDEX.com)